



Sliding shutters



**COPYTRACER**  
Anti-counterfeit registration number



Improved air channels



Bottom clamp



Environment friendly



# DX<sup>3</sup> The Next Step.

Presenting, DX<sup>3</sup>, an international range of protection devices. Its revolutionary design supports all kind of installations thus giving a never before experience. With 10 patents and 13 new features, it defines the next step in the protection category.

New top clamp  
for all tools

Technical  
labelling area



Integrated label  
holder



Black handle: circuit breakers  
Grey handle: switches

Breaking capacity

- 16 kA
- 25 kA
- 36 kA
- 50 kA

Colour coded  
handle with  
ON/OFF  
colour indication



## DX<sup>3</sup> MCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### MCBs for AC applications till 63 A

10 kA ISI marked as per IS/IEC 60898-1 2002  
Integrated label holder  
Sliding bottom clamp  
Improved air channels  
Color coded On/Off indication on dolly  
Biconnect lower terminals  
IP 20 protected terminals  
Sliding shutters  
DC-80 V per pole - 1 kA

### C Curve

#### Single pole 240/410 V

4085 80	0.5	1	440	1/10/120
4085 81	1	1	440	1/10/120
4085 83	2	1	440	1/10/120
4085 84	3	1	440	1/10/120
4085 85	4	1	440	1/10/120
<b>4085 87</b>	6	1	274	1/10/120
<b>4085 90</b>	10	1	274	1/10/120
<b>4085 92</b>	16	1	274	1/10/120
<b>4085 93</b>	20	1	274	1/10/120
<b>4085 94</b>	25	1	274	1/10/120
<b>4085 95</b>	32	1	274	1/10/120
4085 96	40	1	604	1/10/120
4085 97	50	1	604	1/10/120
4085 98	63	1	604	1/10/120

#### Single pole + Neutral 240 V

4086 02	0.5	2	1180	1/5/60
4086 03	1	2	1180	1/5/60
4086 05	2	2	1180	1/5/60
4086 06	3	2	1180	1/5/60
4086 07	4	2	1180	1/5/60
4086 09	6	2	818	1/5/60
4086 12	10	2	818	1/5/60
<b>4086 14</b>	16	2	818	1/5/60
<b>4086 15</b>	20	2	818	1/5/60
4086 16	25	2	818	1/5/60
<b>4086 17</b>	32	2	818	1/5/60
4086 18	40	2	1330	1/5/60
4086 19	50	2	1330	1/5/60
4086 20	63	2	1330	1/5/60

#### Double pole 415 V

4086 21	0.5	2	1172	1/40
4086 22	1	2	1172	1/40
4086 24	2	2	1172	1/40
4086 25	3	2	1172	1/40
4086 26	4	2	1172	1/40
<b>4086 28</b>	6	2	830	1/40
<b>4086 31</b>	10	2	830	1/40
<b>4086 33</b>	16	2	830	1/40
<b>4086 34</b>	20	2	830	1/40
<b>4086 35</b>	25	2	830	1/40
<b>4086 36</b>	32	2	830	1/40
4086 37	40	2	1336	1/40
4086 38	50	2	1336	1/40
4086 39	63	2	1336	1/40

#### Triple pole 415 V

4086 43	0.5	3	1810	1/32
4086 44	1	3	1810	1/32
4086 46	2	3	1810	1/32
4086 47	3	3	1810	1/32
4086 48	4	3	1810	1/32
<b>4086 50</b>	6	3	1356	1/32
<b>4086 53</b>	10	3	1356	1/32
<b>4086 55</b>	16	3	1356	1/32
<b>4086 56</b>	20	3	1356	1/32
<b>4086 57</b>	25	3	1356	1/32
<b>4086 58</b>	32	3	1356	1/32
4086 59	40	3	2070	1/32
4086 60	50	3	2070	1/32
4086 61	63	3	2070	1/32

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.  
♦ For further details on product contact nearest Legrand Sales Office.

## DX<sup>3</sup> MCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Triple pole + Neutral 415 V

4086 65	0.5	4	2268	1/32
4086 66	1	4	2268	1/32
4086 68	2	4	2268	1/32
4086 69	3	4	2268	1/32
4086 70	4	4	2268	1/32
4086 72	6	4	1830	1/32
4086 75	10	4	1830	1/32
4086 77	16	4	1830	1/32
4086 78	20	4	1830	1/32
4086 79	25	4	1830	1/32
<b>4086 80</b>	32	4	1830	1/32
<b>4086 81</b>	40	4	2640	1/32
4086 82	50	4	2640	1/32
<b>4086 83</b>	63	4	2640	1/32

### Four pole 415 V

4086 84	0.5	4	2268	1/32
4086 85	1	4	2268	1/32
4086 87	2	4	2268	1/32
4086 88	3	4	2268	1/32
4086 89	4	4	2268	1/32
4086 91	6	4	1830	1/32
4086 94	10	4	1830	1/32
4086 96	16	4	1830	1/32
4086 97	20	4	1830	1/32
4086 98	25	4	1830	1/32
<b>4086 99</b>	32	4	1830	1/32
<b>4087 00</b>	40	4	2640	1/32
4087 01	50	4	2640	1/32
<b>4087 02</b>	63	4	2640	1/32

### D Curve

#### Single pole 240/415 V

4087 06	0.5	1	436	1/10/120
4087 07	1	1	436	1/10/120
4087 09	2	1	436	1/10/120
4087 10	3	1	436	1/10/120
4087 11	4	1	436	1/10/120
4087 12	6	1	360	1/10/120
4087 14	10	1	360	1/10/120
4087 16	16	1	360	1/10/120
4087 17	20	1	360	1/10/120
4087 18	25	1	360	1/10/120
4087 19	32	1	360	1/10/120
4087 20*	40	1	646	1/10/120
4087 21*	50	1	646	1/10/120
4087 22*	63	1	646	1/10/120

#### Single pole + Neutral 240 V

4087 26	0.5	2	1170	1/5/60
4087 27	1	2	1170	1/5/60
4087 29	2	2	1170	1/5/60
4087 30	3	2	1170	1/5/60
4087 31	4	2	1170	1/5/60

#### Double pole 415 V

4087 32	0.5	2	1170	1/40
4087 33	1	2	1170	1/40
4087 35	2	2	1170	1/40
4087 36	3	2	1170	1/40
4087 37	4	2	1170	1/40
4087 38	6	2	866	1/40
4087 40	10	2	866	1/40
4087 42	16	2	866	1/40
4087 43	20	2	866	1/40
4087 44	25	2	866	1/40
4087 45	32	2	866	1/40
4087 46*	40	2	1400	1/40
4087 47*	50	2	1400	1/40
4087 48*	63	2	1400	1/40

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## DX<sup>3</sup> MCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Triple pole 415 V

4087 52	0.5	3	1810	1/32
4087 53	1	3	1810	1/32
4087 55	2	3	1810	1/32
4087 56	3	3	1810	1/32
4087 57	4	3	1810	1/32
4087 58	6	3	1426	1/32
4087 60	10	3	1426	1/32
4087 62	16	3	1426	1/32
4087 63	20	3	1426	1/32
4087 64	25	3	1426	1/32
4087 65	32	3	1426	1/32
4087 66*	40	3	2202	1/32
4087 67*	50	3	2202	1/32
4087 68*	63	3	2202	1/32



4087 52

### Triple pole + Neutral 415 V

4087 72	0.5	4	2268	1/32
4087 73	1	4	2268	1/32
4087 75	2	4	2268	1/32
4087 76	3	4	2268	1/32
4087 77	4	4	2268	1/32

### Four pole 415 V

4087 78	0.5	4	2268	1/32
4087 79	1	4	2268	1/32
4087 81	2	4	2268	1/32
4087 82	3	4	2268	1/32
4087 83	4	4	2268	1/32
4087 84	6	4	1900	1/32
4087 86	10	4	1900	1/32
4087 88	16	4	1900	1/32
4087 89	20	4	1900	1/32
4087 90	25	4	1900	1/32
4087 91	32	4	1900	1/32
4087 92*	40	4	2742	1/32
4087 93*	50	4	2742	1/32
4087 94*	63	4	2742	1/32



4087 90

### Circuit breakers AC applications 80 - 125 A

10 kA as per IEC 60947-2  
Integrated label holder  
Sliding insulating shield  
Color coded contact indication window  
IP 20 protected terminals  
50 sq mm terminals



4086 00

### Single pole 230 V / 400 V

4085 99	80	1.5	2232	1/5/160
4086 00	100	1.5	2476	1/5/161
4086 01	125	1.5	2648	1/5/162



4086 40

### Double pole 230 V / 400 V

4086 40	80	3	4926	1/5/60
4086 41	100	3	5204	1/5/60
4086 42	125	3	5666	1/5/60



4086 63

### Triple pole 400 V

4086 62	80	4.5	7764	1/9
4086 63	100	4.5	8194	1/9
4086 64	125	4.5	9004	1/9



4087 05

### Four pole 400 V

4087 03	80	6	10120	1/9
4087 04	100	6	10444	1/9
4087 05	125	6	11700	1/9

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.  
\* For further details on product contact nearest Legrand Sales Office.

## DX<sup>3</sup> MCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Circuit breakers DC applications upto 63 A

6 kA as per IEC 60947-2  
Integrated label holder  
Sliding bottom clamp  
Improved air channels  
Color coded On/Off indication on dolly  
Biconnect lower terminals  
IP 20 protected terminals  
Sliding shutters

### Single pole 250 V

4087 98*	0.5	1	688	1/10/120
4087 99*	1	1	688	1/10/120
4088 01*	2	1	688	1/10/120
4088 02*	3	1	688	1/10/120
4088 03*	4	1	688	1/10/120
4088 04*	6	1	572	1/10/120
4088 06*	10	1	572	1/10/120
4088 08*	16	1	572	1/10/120
4088 09*	20	1	572	1/10/120
4088 10*	25	1	572	1/10/120
4088 11*	32	1	572	1/10/120
4088 12*	40	1	754	1/10/120
4088 13*	50	1	754	1/10/120
4088 14*	63	1	754	1/10/120



4088 12

### Double pole 250 V

4088 15*	0.5	1	1388	1/5/60
4088 16*	1	1	1388	1/5/60
4088 18*	2	1	1388	1/5/60
4088 19*	3	1	1388	1/5/60
4088 20*	4	1	1388	1/5/60
4088 21*	6	1	1216	1/5/60
4088 23*	10	1	1216	1/5/60
4088 25*	16	1	1216	1/5/60
4088 26*	20	1	1216	1/5/60
4088 27*	25	1	1216	1/5/60
4088 28*	32	1	1216	1/5/60
4088 29*	40	1	1532	1/5/60
4088 30*	50	1	1532	1/5/60
4088 31*	63	1	1532	1/5/60

## RDSO DC MCB

### Single pole

4088 32	0.5	1	672	1/10/120
4088 33	1	1	672	1/10/120
4088 34	1.5	1	672	1/10/120
4088 35	1.6	1	672	1/10/120
4088 36	2.5	1	672	1/10/120
4088 37	3	1	502	1/10/120
4088 38	4	1	502	1/10/120
4088 39	5	1	608	1/10/120
4088 40	10	1	608	1/10/120
4088 41	15	1	608	1/10/120
4088 42	20	1	608	1/10/120
4088 43	25	1	608	1/10/120
4088 44	30	1	722	1/10/120
4088 45	35	1	722	1/10/120
4088 46	40	1	792	1/10/120
4088 47	50	1	792	1/10/120
4088 48	60	1	792	1/10/120

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## DX<sup>3</sup> isolators

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Isolators for AC applications upto 125 A

ISI marked as per IEC 60947-3  
 Integrated label holder  
 Ergonomic red color dolly  
 Sliding bottom clamp  
 Double break mechanism  
 Improved air channels  
 Color coded On/Off indication on dolly  
 Biconnect lower terminals  
 IP 20 protected terminals  
 Sliding shutters

#### Double pole 240 V

4065 00	32	2	458	1/5/60
<b>4065 01</b>	40	2	504	1/5/60
<b>4065 02</b>	63	2	666	1/5/60
4065 04	100	2	916	1/5/60
4065 05	125	2	1040	1/5/60



4065 00

#### Triple pole 415 V

4065 09	32	3	820	1/40
<b>4065 10</b>	40	3	876	1/40
<b>4065 11</b>	63	3	1038	1/40
4065 13	100	3	1170	1/40
4065 14	125	3	1350	1/40



4065 10

#### Four pole 415 V

4065 18	32	4	900	1/32
<b>4065 19</b>	40	4	1118	1/32
<b>4065 20</b>	63	4	1224	1/32
4065 22	100	4	1522	1/32
4065 23	125	4	1676	1/32



4065 20

## DX<sup>3</sup> RCCBs

### RCCBs for AC applications upto 63 A

ISI marked as per IS 12640-1  
 Integrated label holder  
 Ergonomic Grey color dolly  
 Sliding bottom clamp  
 Color coded On/Off indication on dolly  
 Biconnect lower terminals  
 IP 20 protected terminals  
 35 sq mm terminals  
 Sliding shutters

#### Double pole 240 V

##### 30 mA

<b>4118 51</b>	25	2	2996	1/5/60
<b>4118 52</b>	40	2	3508	1/5/60
4118 53	63	2	4194	1/5/60



4118 51

##### 100 mA

<b>4118 56</b>	25	2	3230	1/5/60
<b>4118 57</b>	40	2	3748	1/5/60
4118 58	63	2	4452	1/5/60



4118 57

##### 300 mA

4118 61	25	2	3288	1/5/60
4118 62	40	2	3830	1/5/60
4118 63	63	2	4480	1/5/60

#### Four pole 415 V

##### 30 mA

4118 76	25	4	4128	1/32
<b>4118 77</b>	40	4	4078	1/32
<b>4118 78</b>	63	4	4730	1/32



4118 77

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

## DX<sup>3</sup> RCCBs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### 100 mA

4118 81	25	4	4282	1/32
<b>4118 82</b>	40	4	4310	1/32
<b>4118 83</b>	63	4	5086	1/32



4118 83

### 300 mA

4118 86	25	4	4386	1/32
<b>4118 87</b>	40	4	4452	1/32
<b>4118 88</b>	63	4	5086	1/32



4118 93

### Four pole 415 V, A-S

##### 300 mA

4118 91	25	2	6356	1/5/60
4118 92	40	2	6438	1/5/60
4118 93	63	2	6724	1/5/60
4118 94	80	2	7866	1/5/60

### Double pole 240 V, HPI

##### 30 mA

4118 71	25	2	6270	1/5/60
4118 72	40	2	6584	1/5/60
4118 73	63	2	6774	1/5/60
4118 74	80	2	8128	1/5/60

### Four pole 415 V, HPI

##### 30 mA

4118 96	25	4	7062	1/32
4118 97	40	4	7284	1/32
4118 98	63	4	7474	1/32
4118 99	80	4	8442	1/32



4118 97

## DX<sup>3</sup> circuit breakers

### AC applications upto 100 A

Integrated label holder  
 Ergonomic Grey color dolly  
 Color coded On/Off indication on dolly  
 Biconnect lower terminals  
 IP 20 protected terminals  
 35 sq mm terminals  
 Sliding shutters

#### Double pole 240 V

##### 30 mA

4115 07	80	2	7006	1/5/60
4115 08	100	2	7616	1/5/60



4115 08



4115 27

##### 100 mA

4115 17	80	2	7006	1/5/60
4115 18	100	2	7254	1/5/60



4117 05

##### 300 mA

4115 27	80	2	7006	1/5/60
4115 28	100	2	7616	1/5/60



4117 15

### Four pole 415 V

##### 30 mA

4117 05	80	4	8226	1/32
4117 63	100	4	7518	1/32

##### 100 mA

4117 15	80	4	8226	1/32
4117 73	100	4	7518	1/32



4117 25

##### 300 mA

4117 25	80	4	8226	1/32
4117 83	100	4	7682	1/32

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.



## DX<sup>3</sup> RCBOs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### RCBOs assembled for AC applications upto 63 A

ISI marked as per IS 12640-2  
Integrated label holder  
Ergonomic design  
Color coded On/Off indication on dolly  
Front face indication for earth leakage fault  
IP 20 protected terminals  
35 sq mm terminals  
Sliding shutters

#### Double pole 240 V, AC Type

##### 30 mA

4113 22	6	4	3624	1/32
4113 23	10	4	3590	1/32
<b>4113 24</b>	16	4	3474	1/32
<b>4113 25</b>	25	4	3474	1/32
<b>4113 26</b>	32	4	3802	1/32
<b>4113 27</b>	40	4	4522	1/32
4113 28	63	4	5410	1/32

##### 100 mA

4113 29	6	4	4514	1/32
4113 30	10	4	4514	1/32
4113 31	16	4	4344	1/32
<b>4113 32</b>	25	4	4266	1/32
<b>4113 33</b>	32	4	4344	1/32
<b>4113 34</b>	40	4	4998	1/32
4113 35	63	4	5786	1/32

##### 300 mA

4113 36	16	4	4490	1/32
<b>4113 37</b>	25	4	4490	1/32
<b>4113 38</b>	32	4	4490	1/32
<b>4113 39</b>	40	4	5144	1/32
4113 40	63	4	5892	1/32

#### Four pole 415 V, AC Type

##### 30 mA

4113 88	6	7	4968	1/16
4113 89	10	7	4968	1/16
4113 65	16	7	4896	1/16
4113 66	25	7	4896	1/16
<b>4113 67</b>	32	7	5050	1/16
<b>4113 68</b>	40	7	5128	1/16
<b>4113 69</b>	63	7	6070	1/16

#### Four pole 415 V, AC Type

##### 100 mA

4113 70	16	7	5522	1/16
4113 71	25	7	5284	1/16
<b>4113 72</b>	32	7	5342	1/16
<b>4113 73</b>	40	7	5498	1/16
4113 74	63	7	6246	1/16

#### Four pole 415 V, AC Type

##### 300 mA

4113 75	16	7	5690	1/16
4113 76	25	7	5492	1/16
<b>4113 77</b>	32	7	5492	1/16
<b>4113 78</b>	40	7	5604	1/16
4113 79	63	7	6354	1/16

### RCBOs compact for AC applications upto 32 A, 6 kA

Conforms to IEC 60947  
Integrated label holder  
Ergonomic design  
Color coded On/Off indication on dolly  
Front face indication for earth leakage fault  
IP 20 protected terminals  
35 sq mm terminals  
Sliding shutters

#### Double pole 240 V, AC Type

##### 30 mA

<b>4113 90</b>	6	2	4218	1/32
----------------	---	---	------	------

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

## DX<sup>3</sup> RCBOs

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Double pole 240 V, AC Type

##### 30 mA

4113 91	10	2	4218	1/32
<b>4113 92</b>	16	2	4218	1/32
4113 93	20	2	4218	1/32
<b>4113 94</b>	25	2	4218	1/32
<b>4113 95</b>	32	2	4428	1/32

##### 300 mA

4113 97	6	2	4344	1/32
4113 98	10	2	4422	1/32
4113 99	16	2	4422	1/32
4114 00	20	2	4422	1/32
4114 01	25	2	4422	1/32
4114 02	32	2	4644	1/32

### Double pole 240 V, HPI Type

##### 30 mA

4114 15	25	2	8090	1/32
4114 16	32	2	8550	1/32

### Four pole 415 V, AC Type

##### 30 mA

4114 18	10	4	5736	1/16
4114 19	16	4	5736	1/16
4114 20	20	4	5736	1/16
4114 21	25	4	5736	1/16
4111 89	32	4	5736	1/16

### Four pole 415 V, AC Type

##### 300 mA

4114 23	10	4	6454	1/16
4114 24	16	4	6454	1/16
4114 25	20	4	6454	1/16
4114 26	25	4	6454	1/16
4112 08	32	4	6454	1/16

### Four pole 415 V, A Type

##### 30 mA

4114 28	10	4	6470	1/16
4114 29	16	4	6470	1/16
4114 30	20	4	6470	1/16
4114 31	25	4	6470	1/16
4112 37	32	4	6470	1/16

### Four pole 415 V, A Type

##### 300 mA

4114 33	10	4	7070	1/16
4114 34	16	4	7070	1/16
4114 35	20	4	7070	1/16
4114 36	25	4	7070	1/16
4112 42	32	4	7070	1/16

## DX<sup>3</sup> RCD add on module

### For 125 A

Conform to IEC 61009-1  
AC type : detect AC components faults  
Hpi type : detect faults with AC and DC components, increased  
Immunity to false tripping  
For mounting on the right-hand side of 1.5 module per pole DX<sup>3</sup> MCBs  
Easy & fast association mechanism  
Terminal cover for locking  
70 sq mm terminals

### Double pole 240 V, AC Type

##### 30 mA

4105 68	125 A	4	12958	1
---------	-------	---	-------	---

##### 100 mA

4105 69	125 A	4	14608	1
---------	-------	---	-------	---

##### 300 mA

4105 71	125 A	4	14608	1
---------	-------	---	-------	---

Bold Cat.Nos are products normally available with Legrand (India) Stockists.  
Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order.  
Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.



4113 24



4113 94



4111 89



4112 08



4112 42



4105 68



4113 79

## DX<sup>3</sup> RCD add on module

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

### Four pole 415 V, AC Type

#### 30 mA

4106 25	125 A	4	20452	1
---------	-------	---	-------	---

#### 100 mA

4106 26	125 A	4	22854	1
---------	-------	---	-------	---

#### 300 mA

4106 29	125 A	4	22854	1
---------	-------	---	-------	---

### Double pole 240 V, HPI type

#### 30 mA

4105 78	125 A	6	16492	1
---------	-------	---	-------	---

#### 100 mA

4105 79	125 A	6	18434	1
---------	-------	---	-------	---

#### 300 mA

4105 82	125 A	6	18434	1
---------	-------	---	-------	---

### Four pole 415 V, HPI type

#### 30 mA

4106 38	125 A	6	28272	1
---------	-------	---	-------	---

#### 100 mA

4106 39	125 A	6	29922	1
---------	-------	---	-------	---

#### 300 mA

4106 42	125 A	6	29922	1
---------	-------	---	-------	---

## DX<sup>3</sup> auxiliaries

### Auxiliaries common for MCBs, Isolators, RCCBs & RCBOs

Easy & fast fixation on site  
On site clip on mounting  
Clip on fitting on left side

Cat.Nos	Description	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	-------------	---------------------------	---------------	------

### Signalling auxiliaries

4062 50	Auxiliary changeover switch 6 A	0.5	820	1
4062 52	Fault signalling changeover switch 6 A	0.5	962	1
4062 64	Changeover + fault signalling switch	1	1546	1

### Control auxiliaries

4062 76	Shunt release 12 /48 V AC/DC	1	2240	1
4062 78	Shunt release 110/415 V V AC	1	2240	1
4062 80	Undervoltage release 24/48 V AC/DC	1	1958	1
4062 82	Undervoltage release 230 V AC	1	1924	1

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

## DX<sup>3</sup> auxiliaries

Cat.Nos	Description	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	-------------	---------------------------	---------------	------

### Control auxiliaries

4062 86	Pop over voltage release	1	2432	1
4062 90	Motor control 24/48 V AC/DC	1	12080	1
4062 91	Motor control 110/415 V AC	1	9292	1
4062 93	Motor control 24/48 V AC/DC	2	20904	1
4062 95	Motor control 110/415 V AC	2	20904	1
4062 88	Automatic resetter	2	9292	1
4062 89	Automatic resetter with autotest	2	13936	1

### Rotary handle

4063 19	Black rotary handle	-	1858	10
4063 20	Yellow/red rotary handle	-	2090	10

### Support for padlock

4063 03	Support for padlock till 63 A	-	434	10
---------	-------------------------------	---	-----	----

### Sealable screw cover

4063 04	Devices upto 63 A	-	442	10
4063 06	For 80-125 A devices	-	4832	10

### 1/2 module spacing unit

4063 07	1/2 module spacing unit	0.5	164	10
---------	-------------------------	-----	-----	----

### 5 mm padlock

4063 13	5 mm Padlock	-	348	10
---------	--------------	---	-----	----

### Manual changover switch

Compact design  
Manual switching operation  
Easy to assemble  
Ergonomic design

### For 1 mod/pole devices

4063 14	Manual change-over switch for DP	1	2090	5
4063 15	Manual change-over switch for TP	1	2556	5
4063 16	Manual change-over switch for FP	1	2786	5

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.

## DX<sup>3</sup> RCD add on module with measurement & metering

Cat.Nos	Nominal Rating	Number of 17.5 mm modules	MRP* ₹ / Unit	Pack
---------	----------------	---------------------------	---------------	------

Conform to IEC 61009-1  
Hpi type: detect faults with AC and DC components, increased  
Immunity to false tripping  
Inbuilt measurement/metering option  
Measurement - V, A, F, PF, KWh, KVA, KVAr, THD  
Metering - V, A, F, KWh  
RS 485 port for remote reading  
Di-electric test button inbuilt  
Ergonomic test button  
Scroll button for easy readings  
RLCD display on front facia  
For mounting on the right-hand side of 1.5 module per pole DX<sup>3</sup> MCBs  
Easy & fast association mechanism  
70 sq mm terminals

### Adjustable metering, four pole 415 V

4106 57	63 A	7	14164	1
4106 58	125 A	7	25962	1

### Adjustable measurement

4106 59	125 A	7	28592	1
---------	-------	---	-------	---

## DX<sup>3</sup> time switches

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	---------------	------

### Time switches

#### AlphaRex<sup>3</sup> digital time switches

Daily and weekly time switch  
Quick and easy programming due to the option to select day blocks, day blocks can be individually set or selected from the blocks Mon-Sun, Mon-Fri or Sat-Sun  
Programming with precision to the second  
Switch times visible in weekly overview on display

4126 31	AlphaRex <sup>3</sup> D21, 1 channel	4510	1
4126 41	AlphaRex <sup>3</sup> D22, 2 channels	6766	1
4126 34	AlphaRex <sup>3</sup> D21s, 1 channel	5364	1

#### AlphaRex<sup>3</sup> digital time switches - Astro

- For switching on/off lights and other electric devices according to the rising/setting of the sun
- With combination function for creating switching programs in which the devices are switched according to astronomical time and/or fixed preset times
- Daily astronomical calculation of the sunrise/sunset times based on the entered location or location coordinates

4126 54	AlphaRex <sup>3</sup> D21 astro, 1 channel	9024	1
4126 57	AlphaRex <sup>3</sup> D22 astro, 2 channels	10376	1

#### AlphaRex<sup>3</sup> yearly time switch

- Yearly and weekly time switch with additional astronomical function for all channels
- 84 switching programs per channel, comprising:
  - 28 weekly programs
  - 28 yearly programs
  - 28 special programs (priority program)

4126 29	AlphaRex <sup>3</sup> DY21, 1 channel	24586	1
4126 30	AlphaRex <sup>3</sup> DY22, 2 channels	25292	1

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.



4106 57



4126 41



4126 54



4126 57



4126 29



4128 12



4128 14



4125 44

## DX<sup>3</sup> time switches

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	---------------	------

### Programming accessories

4128 72	Data key	1312	1
4128 73	PC adapter for USB port	4470	1

### Twilight switches

- Including light sensor
- Wire for light sensor: 2 x 1.5 mm<sup>2</sup>, maximum wire length: 50 m
- LED switching status indicator

4126 23	Luxo switch	6088	1
---------	-------------	------	---

### MicroRex analog time switches

In accordance with IEC 60730-1 and 60730-2-7  
Manual switching ON/automatic/OFF  
Hourly/daily/weekly switching dial with captive segments  
Clock precision: +/- 5 min for the daily time switch  
-10 °C to +55 °C operating temperature

4128 23	MicroRex T31 Su/Wi – Daily time switch	5692	1
4128 28	MicroRex W31 Su/Wi – Weekly time switch	6090	1

### MicroRex analog time switches

4128 12	MicroRex T31 – Daily time switch	4554	1
4128 13	MicroRex QT31 – Daily time switch	5106	1
4128 14	MicroRex W31 – Weekly time switch	5466	1
4127 90	MicroRex QT11 – Daily time switch	3188	1
4127 94	MicroRex QW11 – Weekly time switch	3680	1

### Accessory

4128 59	Wall bracket	944	1
---------	--------------	-----	---

## DX<sup>3</sup> contactors

### Power contactors CX<sup>3</sup>

Conform to IEC/EN 61095  
Space for power supply busbar on top (up to 25 A)

4125 44	25 A 2 NO contactor	1816	1
4125 45	40 A 2 NO contactor	3102	1
4125 47	63 A 2 NO contactor	3608	1
4125 48	63 A 2 NC contactor	3608	1
4125 49	40 A 3 NO contactor	5186	1
4125 50	63 A 3 NO contactor	5866	1
4125 51	25 A 4 NO contactor	2144	1
4125 53	40 A 4 NO contactor	5472	1
4125 56	63 A 4 NO contactor	6480	1
4125 57	63 A 4 NC contactor	6542	1

### Signalling auxiliaries for contactors

#### Auxiliary changeover switch

4124 29	For 1 module contactors 16 A to 25 A	2740	1
4124 30	For 2 module contactors 25 A	2750	1
4124 31	For 40 and 63 A contactors	3608	1

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.



## DX<sup>3</sup> for photovoltaic applications

Cat.Nos	Description	MRP* ₹ / Unit	Pack
---------	-------------	------------------	------

### DC MCBs

Breaking capacity 4.5 kA according to EN 60947-2

#### 800 V<sub>DC</sub> circuit breakers

4144 24	6 A	■	1
4144 25	8 A	■	1
4144 26	10 A	■	1
4144 27	13 A	■	1
4144 28	16 A	■	1
4144 29	20 A	■	1

#### 1000 V<sub>DC</sub> circuit breakers

4144 46	10 A	■	1
4144 47	13 A	■	1
4144 48	16 A	■	1
4144 49	20 A	■	1
4144 50	25 A	■	1
4144 51	32 A	■	1

### Type 2 voltage surge protectors

DC side protection of photovoltaic installations connected to the low voltage network (without energy storage system)  
Conforming to UTE guide C 61-740-51  
Protection in common mode and residual current mode (Y mode) 1  
Consisting of plug-in modules with LED indicator  
Red: modules need to be replaced

#### Voltage surge protectors

4141 60	600 V= 25KA I <sub>max</sub>	■	1
4141 51	1000 V 40KA I <sub>max</sub>	■	1

#### Plug-in replacement module

4141 90	+/- cassette for voltage surge protector 4141 60	■	1
4141 91	T cassette for voltage surge protector 4141 60	■	1
4141 81	+/- and T cassette for voltage surge protector 4141 51	■	1

### DC rotary handle isolating switches

Category of use DC 21B according to EN 60947-3  
Double break contacts

#### 600 V<sub>DC</sub> isolating switches

4142 61	16 A	■	1
4142 62	25 A	■	1
4142 63	32 A	■	1

#### 1000 V<sub>DC</sub> isolating switches

4142 81	16 A	■	1
4142 82	25 A	■	1
4142 83	32 A	■	1

### Accessories

4063 05	Pole separation divider	■	1
4063 07	Spacing unit 0.5 unit	■	10

■ Price available on request.

\* MRP - Maximum Retail Price Inclusive of all taxes including GST.

## SURGE PROTECTIVE DEVICES


# Solutions for all installations and risk levels

Clear, easily identifiable marking for easier maintenance, design in line with other Legrand modular equipment, well thought features: the new SPDs integrate perfectly in the modular rows of Legrand distribution boards and protects sensitive equipment.




Easier to handle: the plug-in modules are easy to replace thanks to the extraction handles.

### Status indicator and remote monitoring of information

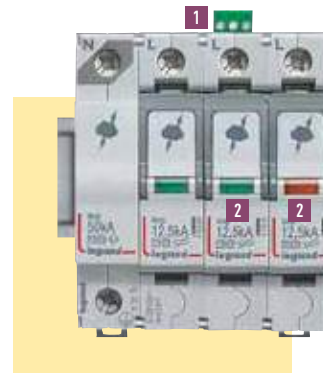

- 1 Fault signal contact
- 2 Status indicator

### Design and marking

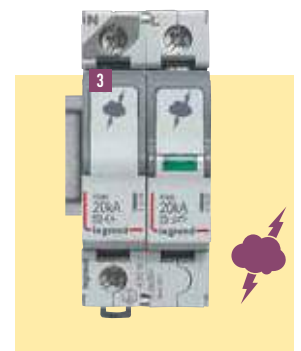

- 3 Dedicated marking for easier identification and maintenance of the SPDs.

Bold Cat.Nos are products normally available with Legrand (India) Stockists. Cat.Nos that are not bold - delivery within 4 - 8 weeks from the date of order. Bold packing quantity is our mandatory packing. Orders to be placed by Legrand (India) Stockist in multiples of the same.